

NPP-SPSS SERIES STAINLESS STEEL PUMP



NPP-SPSS3003B





NPP-SPSS5004B

APPLICATIONS:

Sewage/waste water applications, all SS construction for use in chemical plants, metal industries, medical applications, animal farming, pulp and paper, as well as many other harsh chemical and industrial applications

FEATURES:

- All 304/316 stainless construction
- Industrial standard for corrosive resistance
- Professionally engineered for maximum performance, efficiency, and chemical resistance
- Dynamically balanced impeller and pump shaft for maximum bearing life and pump efficiency
- Chemical and abrasive resistant SIC mechanical seal and fluorine elastomers
- Float switch option for 2hp and smaller units
- Chemical resistant cable base and cable

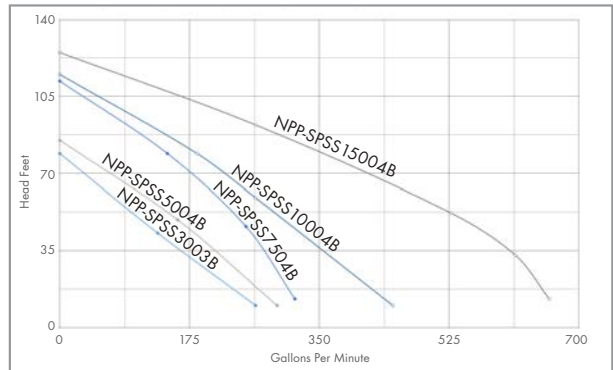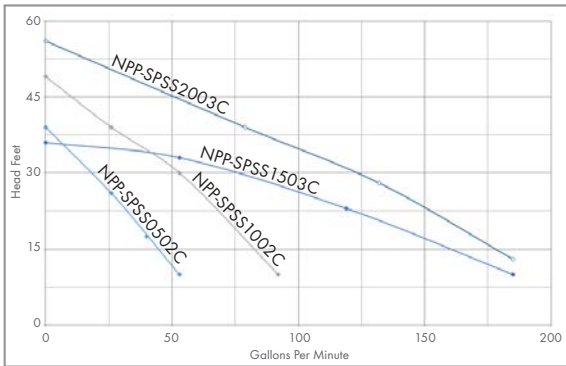

| MODEL | HP | DISCHARGE | PHASE | RATED HEAD FT | RATED FLOW GPM | MAX FLOW | MAX HEAD | SOLIDS PASSAGE INCH | WEIGHT LBS |
|----------------|-----|-----------|----------------|---------------|----------------|----------|----------|---------------------|------------|
| NPP-SPSS0502C | 1.5 | 2" | 1Ø / 3Ø | 23' | 32 | 53 | 39' | .47" | 31 |
| NPP-SPSS1002C | 1 | 2" | 1Ø / 3Ø | 30' | 53 | 92 | 49' | .59" | 42 |
| NPP-SPSS1503C | 1.5 | 3" | (1Ø-220v) / 3Ø | 23' | 106 | 185 | 36' | .79" | 49 |
| NPP-SPSS2003C | 2 | 3" | (1Ø-220v) / 3Ø | 26' | 132 | 185 | 56' | .79" | 68 |
| NPP-SPSS3003B | 3 | 3" | 3Ø | 43' | 132 | 264 | 79' | 1.18" | 110 |
| NPP-SPSS5004B | 5 | 3"/4" | 3Ø | 62' | 132 | 291 | 85' | 1.38" | 117 |
| NPP-SPSS7504B | 7.5 | 3"/4" | 3Ø | 82' | 132 | 317 | 112' | 1.38" | 132 |
| NPP-SPSS10004B | 10 | 4" | 3Ø | 59' | 264 | 449 | 115' | 1.57" | 225 |
| NPP-SPSS15004B | 15 | 4" | 3Ø | 92' | 264 | 660 | 125' | 1.57" | 243 |