



NPP-SPSS4P30008B

NPP-SPSS4P5004B



# NPP-SPSS (4P) SERIES STAINLESS STEEL SEWAGE PUMP

## APPLICATIONS:

Sewage/waste water applications, all SS construction for use in chemical plants, metal industries, medical applications, animal farming, pulp and paper, food industry, as well as many other harsh chemical & industrial applications

## FEATURES:

- 4 pole-1760rpm design, high efficiency motor, low wear, & long life design
- Overload protection option
- Professionally engineered for maximum performance, efficiency, and chemical resistance
- Chemical and abrasive resistant double mechanical seal and fluorine elastomers
- Large capacity, abrasive resistant, precision balanced SS impeller
- Cable Base is epoxy filled
- Easy to repair and replace wearable parts of the pump assembly
- All 316 Stainless Construction. High Industrial standard for corrosive resistance
- Professionally engineered for maximum performance, efficiency, and chemical resistance
- Dynamically balanced impeller and pump shaft for maximum bearing life and pump efficiency
- Easy to repair and replace wearable parts of the pump assembly

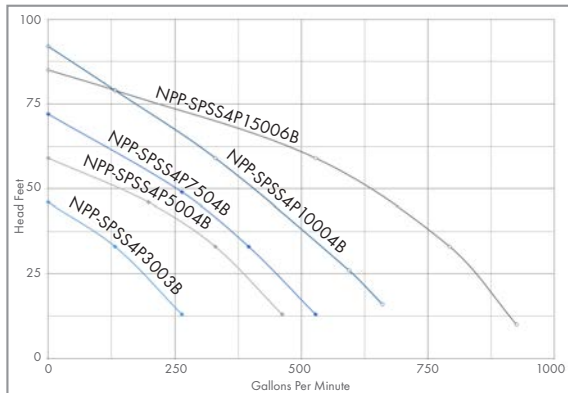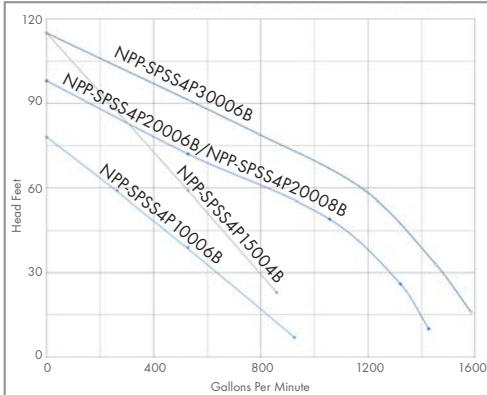

MODEL	HP	DISCHARGE	PHASE	RATED HEAD FT	RATED FLOW GPM	MAX FLOW	MAX HEAD	SOLIDS PASSAGE INCH	WEIGHT LBS
NPP-SPSS4P3003B	3	3"	3Ø	33'	132	264	46'	1.57"	176
NPP-SPSS4P5004B	5	4"	3Ø	39'	264	462	59'	1.57"	190
NPP-SPSS4P7504B	7.5	4"	3Ø	49'	264	528	72'	1.18"	238
NPP-SPSS4P10004B	10	4"	3Ø	66'	264	660	92'	1.57"	340
NPP-SPSS4P10006B	10	6"	3Ø	39'	528	925	75'	1.77"	406
NPP-SPSS4P15004B	15	4"	3Ø / Y-Δ	89'	264	793	115'	1.77"	441
NPP-SPSS4P15006B	15	6"	3Ø / Y-Δ	59'	528	925	85'	1.77"	518
NPP-SPSS4P20006B	20	6"	3Ø / Y-Δ	72'	528	1453	98'	2.17"	540
NPP-SPSS4P20008B	20	8"	3Ø / Y-Δ	49'	1057	1453	98'	2.36"	595
NPP-SPSS4P30006B	30	6"	3Ø / Y-Δ	89'	528	1585	115'	2.17"	617
NPP-SPSS4P30008B	30	8"	3Ø / Y-Δ	66'	1057	1585	115'	2.36"	661