





NPP-SP SERIES SEWAGE PUMP

APPLICATIONS:

Sewage/waste water, general de-watering, farming, collection tanks, & various industrial wastewater applications

FEATURES:

- 1.5hp and larger units include double mechanical seal
- Float switch option on 2hp and smaller units
- Stainless steel fasteners, motor frame, & pump shaft
- Easy to repair and replace wearable parts of the pump assembly
- Cable base is epoxy filled

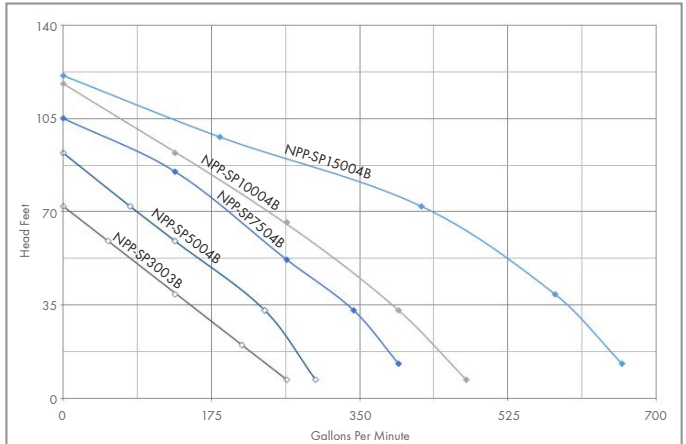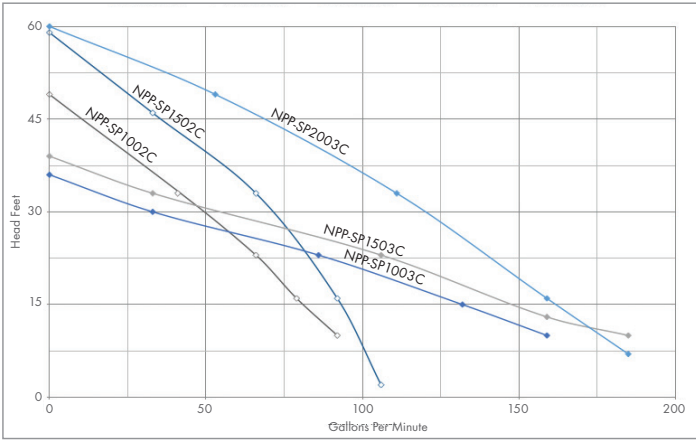

MODEL	HP	DISCHARGE	PHASE	RATED HEAD FT	RATED FLOW GPM	MAX FLOW	MAX HEAD	SOLIDS PASSAGE INCH	WEIGHT LBS
NPP-SP1002C	1	2"	1Ø / 3Ø	30'	50	95	50'	0.47"	42
NPP-SP1003C	1	3"	1Ø / 3Ø	20'	105	160	40'	0.47"	44
NPP-SP1502C	1.5	2"	(1Ø-220v) / 3Ø	40'	50	110	60'	0.59"	53
NPP-SP1503C	1.5	3"	(1Ø-220v) / 3Ø	22'	105	185	40'	0.79"	55
NPP-SP2003C	2	3"	(1Ø-220v) / 3Ø	26'	135	185	60'	0.79"	90
NPP-SP3003B	3	3"	3Ø	40'	135	265	70'	1.18"	108
NPP-SP5004B	5	3 3/4"	3Ø	60'	135	300	90'	1.38"	121
NPP-SP7504B	7.5	3 3/4"	3Ø	85'	135	400	105'	1.38"	132
NPP-SP10004B	10	4"	3Ø	65'	260	320	120'	1.57"	336
NPP-SP15004B	15	4"	3Ø	90'	260	660	120'	1.57"	35

