


NPP-RS SERIES GUIDE RAIL EQUIPMENT



NPP-RS



NPP-SS-RS

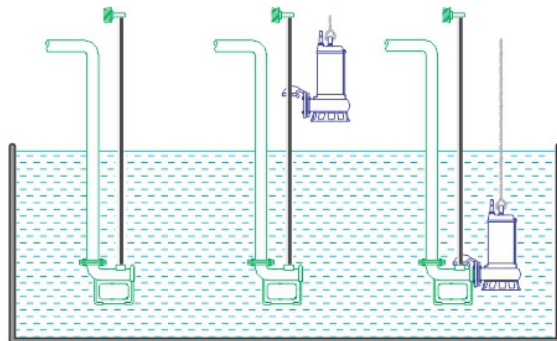

Step 1

Step 2

Step 3

APPLICATIONS:

Perfect for per-installation and sump planning. Excellent for high service pumps in aggressive applications requiring scheduled and routine maintenance. Pump diversity, ability to move pumps from sump location to sump location based on demand and usage requirement. Perfect for sumps in the lower level of buildings and parking garages.

FEATURES:

- Discharge elbows and guide rail assemblies from 2" - 8"
- 304SS and 316SS high quality stainless steel material options for chemically aggressive pumping applications
- Convenient and simple installation

COMPONENTS:

- Heavy duty mounting base
- Pump discharge adapter
- Guide rail positioning bracket
- Stainless steel chains

Note: Guide rails not provided.

SIMPLE INSTALLATION PROCESS:

Step 1: Secure mounting base to sump floor, attach discharge pipe, and install guide rails.

Step 2: Using a chain and hoist slowly lower the pump into position along the guide rails.

Step 3: Properly engage the pump with the guide rail system and discharge elbow.

MODEL	DISCHARGE	PUMP RANGE (HP)	GUIDE RAIL (INCH)	MATERIAL
NPP-RS02	2"	1/2HP-1.5HP	1"	Cast Iron
NPP-RSA03	3"	2HP-5HP	1.5"	Cast Iron
NPP-RSB03	3"	2HP-5HP	1.5"	Cast Iron
NPP-RSA04	4"	7.5HP-15HP	1.5"	Cast Iron
NPP-RSB04	4"	5HP-7.5HP	1.5"	Cast Iron
NPP-RSA06	6"	10HP-30HP	1.5"	Cast Iron
NPP-RSB06	6"	10HP-30HP	1.5"	Cast Iron
NPP-RS08	8"	20HP-30HP	1.5"	Cast Iron
NPP-SS-RS02	2"	1/2HP-1HP	1"	304SS
NPP-SS-RSA03	3"	2HP-5HP	1.5"	304SS
NPP-SS-RSA04	4"	7.5HP-15HP	1.5"	304SS
NPP-SS-RSA06	6"	10HP-30HP	1.5"	304SS
NPP-SS-RSB06	6"	10HP-30HP	1.5"	304SS
NPP-SS-RS08	8"	20HP-30HP	1.5"	304SS